

Tygon® SPT-60 L

High Precision Tubing for Automatic Water Sampling Equipment

Water is vitally important to every aspect of life. We have a vast network of branching rivers, swamps, lakes, etc. and each body of water can contain dramatically different levels of pollution. Measuring water quality is not an easy task, especially as increasing environmental concerns and regulations have heightened the need for increased diligence and tighter restrictions on water quality. Scientists are continuously testing to determine what effects contamination is having on receiving waters and their associated aquatic life. Peristaltic pumps are often employed as samplers, in order to prevent cross-contamination, as the only part of the pump to come in contact with the water is the interior of the tubing itself. Tygon® SPT-60 L tubing was specifically designed for automatic water samplers, offering sample integrity along with accurate dosing and performance at high lift.

Accurate and Repeatable Dosing

Water samplers require repeatable pump control for accurate dosing. The sampler needs to be capable of collecting a series of samples, on a times and/or flow proportional basis. In order to meet certain performance standards, the average velocity of the sample as it passes through the line during the event should be less than 0.5 ms⁻¹ and the mean error of the sample volume cannot be greater than 5% of the set volume over the tested range for sampling head.

Graph 1 on page 2 shows Tygon® SPT-60 L tubing's outstanding volume stability during pumping, which remains extremely consistent throughout its entire product life.

Performance at High Lift

A unique feature of peristaltic pumps is their ability to provide high suction lift. Most other metering pumps can only dry lift a few feet, requiring a flooded suction. With its exceptional dimensional stability and surface smoothness, Tygon® SPT-60 L tubing enables peristaltic pumps to have a superior suction capability of up to 29 feet, eliminating the need for a flooded suction and providing added flexibility during installation.

Sample Integrity

During the water sampling process, the tubing has the potential to impact the characteristics of the water being transferred and affect the chemical composition of the sample. This ultimately affects how representative the sample is of the water being analyzed. Thus, it is extremely important that the tubing does not leach or absorb any chemicals, which Tygon® SPT-60 L tubing demonstrates in Graph 2 on page 2.

Tygon® SPT-60 L tubing was precision designed to provide a coveted combination of chemical resistance, flexibility and reliability, thus providing water sampling equipment manufacturers with the ideal tubing for monitoring water quality.




Features and Benefits


- Accurate and repeatable dosing
- Sample integrity
- Performance at high lift

From Saint-Gobain, the multi-material, application experts offering optimized purity, ease-of-use and pump performance.

Graph 1
Volume Stability During Pumping

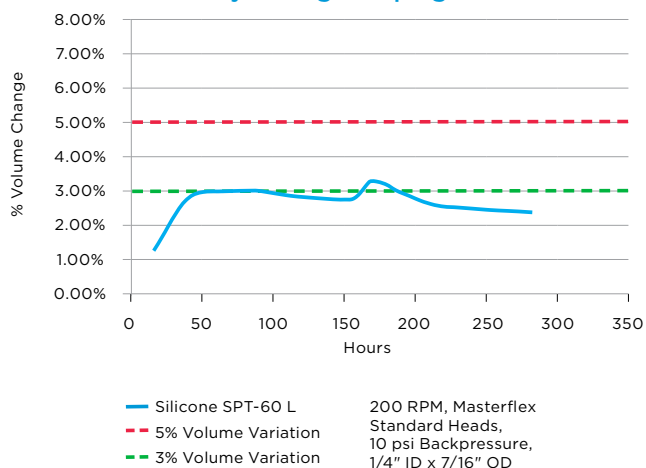

Graph 2
Tygon® SPT-60 L Chemical Resistance

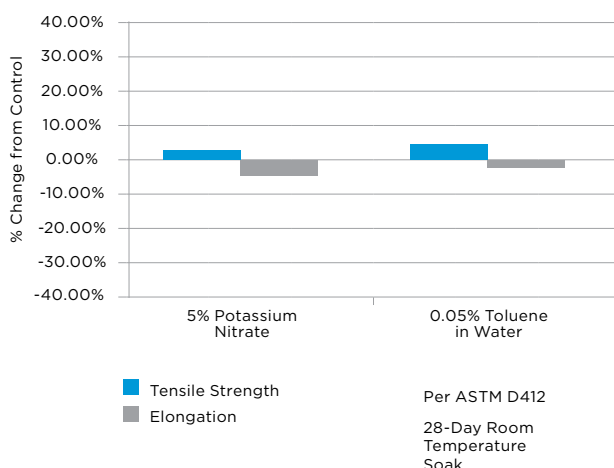

Typical Physical Properties

Property	Limits	References*
Appearance	Translucent	VISUAL
Specific Gravity	1.09 - 1.15	SOP 144
Durometer Hardness (Shore A)	55 - 65	SOP 114
Tensile Strength (psi)	900 MIN	SOP 93
Elongation (%)	300 MIN	SOP 93
Tear, Die B (ppi)	150 MIN	SOP 93
Temperature Range	-75 to 350 continuous	
Max. Recommended Operating Temp (°F)	-75 to 400 intermittent	

* Referenced SOPs are based on ASTM Test Methods.

Test conditions: using a .075" ASTM test slab
Press cure: 10 minutes at 250°F
Post cure: 2 hours at 385°F

Note: These specifications are based on testing using an ASTM test slab. Physical properties of finished parts may vary slightly from these results.

The values listed for working and burst pressures are derived from tests conducted under controlled laboratory conditions. Many factors will reduce the tubing's ability to withstand pressures, including temperature, chemical attack, stress, pulsation and the attachment to fittings. It is imperative that the user conduct tests simulating the conditions of the application prior to specifying the tubing for use.

TYGON® SPT-60 L TUBING IS NOT INTENDED FOR USE AS AN IMPLANT MATERIAL.

www.ics.saint-gobain.com



Saint-Gobain Performance Plastics

3910 Terry-Diane Street
Beaverton, MI USA 48612
1-888-387-0067
Tel: (989) 435-9533
Fax: (989) 435-2355

Saint-Gobain Performance Plastics

Devanahalli Road Via
Old Madras Road
Bangalore, India 500049
Tel: (91) 80-3097-8888
Fax: (91) 80-3097-8524

NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Tygon® is a registered trademark.