



Washdown Hose


NITRILE-PVC BLEND WASHDOWN HOSE

Saint-Gobain's Washdown Hose is specifically designed for cleanup service in dairies, creameries, breweries, food, beverage, meat and poultry processing plants. This high quality, yet economically constructed hose is capable of handling hot water up to 200°F (93°C).

The abrasion resistant cover of the Washdown Hose increases the service life of the hose. The spiral reinforcement provides excellent flexibility for handling ease and the non-marking white cover helps maintain a sanitary appearance.

Typical Applications

- Cleanup service in food, beverage, meat and poultry processing plants, dairies, creameries and breweries

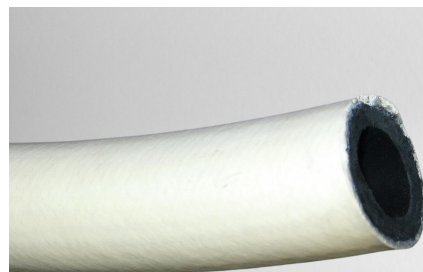

Features and Benefits

- Designed for food and beverage clean-up service
- Handles hot water up to 200°F (93°C)
- Abrasion resistant, non-marking cover
- Spiral construction for excellent flexibility



Washdown Hose

Washdown Hose Specifications

Part Number	Inside Diameter		Outside Diameter		Maximum Working Pressure		Weight	
	(in)	(mm)	(in)	(mm)	(psi)	(MPa)	(lb/ft)	(kg/m)
WDH75	3/4	19.1	1-6/32	30.2	300	2.07	0.4	0.60

NOTE: Weights and outside diameter dimensions are nominal. Data given is for hose only. Pressure ratings are shown at ambient temperature (68°F). As temperatures increase, working pressure and vacuum ratings will decrease. Contact factory for recommendations for assembly applications that exceed 200°F. Available only in 500 ft. coil.

Construction

Inner Tube:	Black Nitrile
Cover:	Nitrile/PVC blend
Reinforcement:	Two synthetic textile spiral cords
Color:	White
Temperature Rating:	-20°F to +200°F -29°C to +93°C
Maximum Length:	500 feet coil

Fitting Options

- Shank style with strap or worm gear type clamp (not supplied by Saint-Gobain)

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



Saint-Gobain
210 Harmony Road
Mickleton, NJ 08056
USA

www.ics.saint-gobain.com



NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.